

36-port 10G Uplink L3 Managed Industrial Ethernet Switch

(IS830-12E8F4F)

Product Description

The IS830-16E8C4F-B is a 10G uplink L3 managed industrial Ethernet fiber switch. It has 8*10/100/1000Base-T RJ45 or 8*100/1000Base-X SFP combo ports and 4*1/10G SFP+ fiber slot ports and 16*100/1000Base-X SFP ports. Each port can support wire-speed forwarding.

The IS830-16E8C4F-B has L3 network management function, supports IPV4/IPV6 management, dynamic routing full line-speed forwarding, complete security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS(<20ms) to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application needs, port management, routing address management, port flow control, VLAN division, IGMP, security policy and other application services are configured through network management methods such as Web, CLI, SNMP, Telnet, etc. It is suitable for intelligent transportation, rail transit, electric power, mining, metallurgy, and green energy. industrial scenes such as construction set up a cost-effective and stable communication network.



Product Features

● Gigabit multi fiber port access, 10G uplink

- ✧ Support non-blocking wire-speed forwarding.
- ✧ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.
- ✧ Support Gigabit Ethernet port and 10G SFP+ uplink port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

● Security

- ✧ 802.1X authentication.
- ✧ Port isolation, Storm control.
- ✧ IP-MAC-VLAN-Port binding.

● Strong business processing capability

- ✧ ERPS/STP/RSTP/MSTP.
- ✧ Static and dynamic aggregation.
- ✧ IGMP V1/V2 and IGMP Snooping.
- ✧ IEEE802.1Q VLAN, flexible VLAN division, Voice VLAN, and QinQ configuration.
- ✧ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including EQU, SP, WRR & SP+WRR.
- ✧ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.

● Stable and reliable

- ✧ CCC, CE, FCC, RoHS.
- ✧ Low power consumption, No fan, galvanized steel case.
- ✧ Self-developed power supply, high redundancy design, providing a long term and stable power output.
- ✧ The user-friendly panel can show the device status through the LED indicator of PWR, Link.

● Easy operation and maintenance management

- ✧ HTTPS, SSLV3, and SSHV1/V2.
- ✧ RMON, system log, LLDP, and port traffic statistics.
- ✧ CPU monitoring, memory monitoring, Ping test, and cable diagnose.
- ✧ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).

Product Parameters

Model	IS830-16E8C4F-B
Interface Characteristics	
Fixed Port	1*AC100-240V input ports
	Alarm switch port (FAULT)
	1*Console port (115200, N, 8,1)
	4*1/10G uplink SFP+ ports (Data)
	16*100/1000Base-X SFP ports (Data)
	8*10/100/1000Base-T RJ45 or 8*100/1000Base-X SFP combo port (Data)
	1 group of DC12-48V input ports (Support reverse polarity protection function)
Ethernet Port	Port 1-8 support 10/100/1000Base-T(X) auto-sensing, Full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤ 100 meters)
	100BASE-TX: Cat5 or later UTP(≤ 100 meters)
	1000BASE-T: Cat5e/6 or later UTP(≤ 100 meters)
Optical Fiber Port	Gigabit SFP optical fiber port and 10G SFP+ optical fiber port, default no include optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Fiber Port Expansion	Support Turbo overclocking 2.5G optical module expansion and ring network
Optical Cable/ Distance	Multi-mode: 850nm//0-500M(1G), 850nm/0-300M (10G)
	Single-mode: 1310nm/ 0-40KM, 1550nm/ 0-120KM.
Chip Parameter	
Network Management Type	L3
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX
	IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X
	IEEE802.3ae 10GBase-LR/SR, IEEE802.3x
Forwarding Mode	Store and Forward(Full Wire Speed)
Switching Capacity	336Gbps (non-blocking)
Forwarding	95.23Mpps


Rate@64byte	
CPU	800MHz
DRAM	1GB
FLASH	128MB
MAC	16K
Buffer Memory	12MB
Jumbo Frame	12KB
LED Indicator	Power: PWR (Yellow), System:SYS (Yellow), Network: Link/Act (Yellow), Fiber port : L/A (Green)
Reset Switch	Yes, Press and hold the reset switch for 10s and release it to restore the factory settings
Power Supply	
Total PWR / Input Voltage	60W (AC100-240V)
Power Consumption	Standby<35W, Full Load<45W
Power Supply	Built-in power supply, AC 100~240V 50-60Hz 0.65A
Power Supply Interface	2 group of DC12-48V input port
	Alarm switch port, 1 group of AC power input ports
	Dual input power port design: AC power supply priority, support anti-reverse protection, power-off automatic switching DC connection.
Physical Parameter	
Operation TEMP / Humidity	-40~+75°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+80°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*298*44mm
Net /Gross Weight	<5.0kg / <5.6kg
Installation	Desktop, 19 inch 1U cabinet
Certification & Warranty	
Lightning Protection	Lightning protection: 6KV 8/20us; Protection level: IP40
	IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge
	IEC61000-4-3(RS):10V/m(80~1000MHz)
	IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV

	IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV
	IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz)
	IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s
	IEC61000-4-9(pulsed magnet field):1000A/m
	IEC61000-4-10(damped oscillation):30A/m 1MHz
	IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV
	IEC61000-4-16(common-mode transmission):30V; 300V,1s
	FCC Part 15/CISPR22(EN55022):Class B
	IEC61000-6-2(Common Industrial Standard)
Mechanical Properties	IEC60068-2-6 (anti vibration)
	IEC60068-2-27 (anti shock)
	IEC60068-2-32 (free fall)
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	5 years, lifelong maintenance.
Network Management Features	
Interface	IEEE802.3x flow control (full duplex)
	Port exception protection mechanism
	Port real-time flow management (Flow Interval)
	Broadcast storm suppression based on port rate
	Optical port SFP module DDMI real-time digital diagnosis
	Limit the rate of incoming and outgoing packet traffic, with a minimum granularity of 16Kbps and a maximum of 1Gbps
	Port EEE Green Ethernet Energy-Saving configuration and status view
	Jumbo frame configuration, the largest 12000byte
Layer 3 Features	IPV4 Equal Cost Routing
	NG protocol, maximum 1000 entries
	ARP protocol, maximum 1000 entries
	Pingv6, Telnetv6, TFTPv6, DNSv6, ICMPv6
	IPV4/IPV6 VRRP, the maximum group is 255
	IPV4/IPV6 VLANIF interface supports up to 128
	IPV4/IPV6 static route/default route supports up to 128 entries

	L3 network management function, IPV4/IPV6 dual-stack management
	IPV4 dynamic routing, RIPv1/v2, OSPFv2, BGP4+, 4000 routing entries
	IPV6 dynamic routing OSPFv3, BGP+, RIPng, IPV6 management, 1000 routing entries
	Layer 3 routing and forwarding, support communication between different network segments and different VLANs
VLAN	VLAN based on MAC, VLAN based on the protocol
	Port configuration of Access, Trunk, Hybrid, GVRP VLAN protocol
	(4K) VLAN based on port, IEEE802.1q, Voice VLAN, QinQ configuration
Port Aggregation	LACP, Static aggregation
	Max 14 aggregation groups and 8 ports per group.
Spanning Tree	STP BPDU Guard, BPDU filtering and BPDU forwarding
	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
ERPS Ring Network	Support ERPS ring network, ring network self-healing time is less than 20ms, ITU-T G.8032
Multicast	MLD Snooping, IGMP Snooping, Multicast VLAN
	User quick log out, MVR (Multicast LAN registration)
	IGMP Snooping v1/v2/v3 and 1024 multicast groups at most
Mirroring	Bidirectional traffic mirroring for basic ports
	Supports 1-to-multiple mirroring, supports up to 4 port sessions
QoS	Queue Scheduling Algorithm (SP, WRR, SP+WRR)
	Flow-based Rate Limiting, Stream based redirection
	Flow-based Packet Filtering, 8*Output queues of each port
	802.1p/DSCP priority mapping, Diff-Serv QoS, Priority Mark/Remark
ACL	ACL distribution based on port and VLAN
	L2-L4 packet filtering function, matching the first 80 bytes message, and provides ACL definitions based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN, etc.
Security	Port based IEEE802.1X authentication
	SSL guarantees data transmission security
	Quad binding function of IP+MAC+VLAN+ports
	MAC address learning limit, MAC address black hole


	Anti DoS attack, Port broadcast message suppression
	IP Source Guard function, AAA&RADIUS certification
	Hierarchical user management and password protection
	SSH 2.0 provides a secure encrypted channel for user login
	Host data backup mechanism, ARP intrusion detection function
	Port isolation, IP Source Guard, ARP message speed limit function
DHCP	DHCP Client, DHCP Snooping, DHCP Server
Management	Web network management (https)
	Link Layer Discovery Protocol(LLDP)
	Viewing CPU Instant Utilization Status
	NTP clock, One click restore, SNMP V1/V2C/V3
	Cable status check, Ping detection, System work log
	NMS platform cluster management (LLDP+SNMP)
	Console/AUX Modem/Telnet/CLI command line configuration
	FTP, TFTP, Xmodem, SFTP file upload and download management
System	Category 5 Ethernet network cable
	Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later
	TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network

Product size

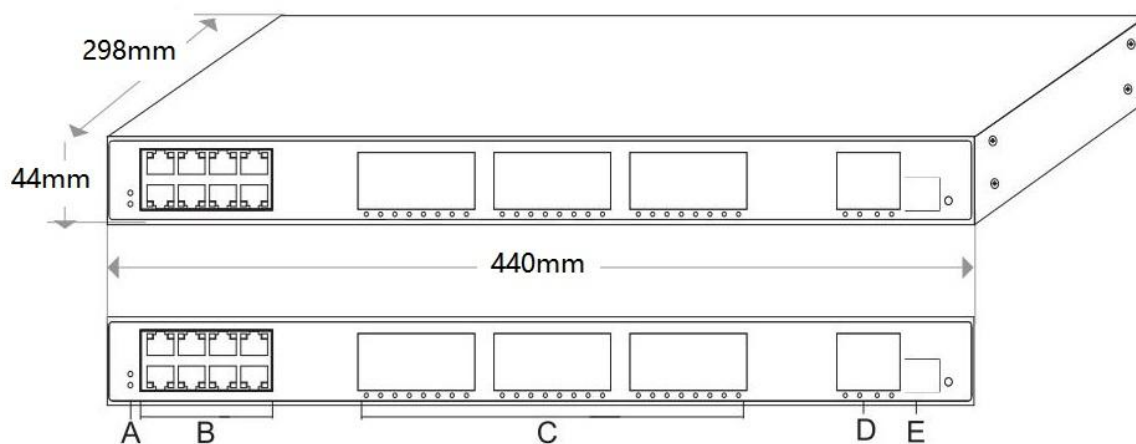

- A. Working indicator
B. 8*10/100/1000M RJ45 ports
C. 24*100/1000M SFP combo ports
D. 4*1/10G SFP+ ports
E. Console port

Application

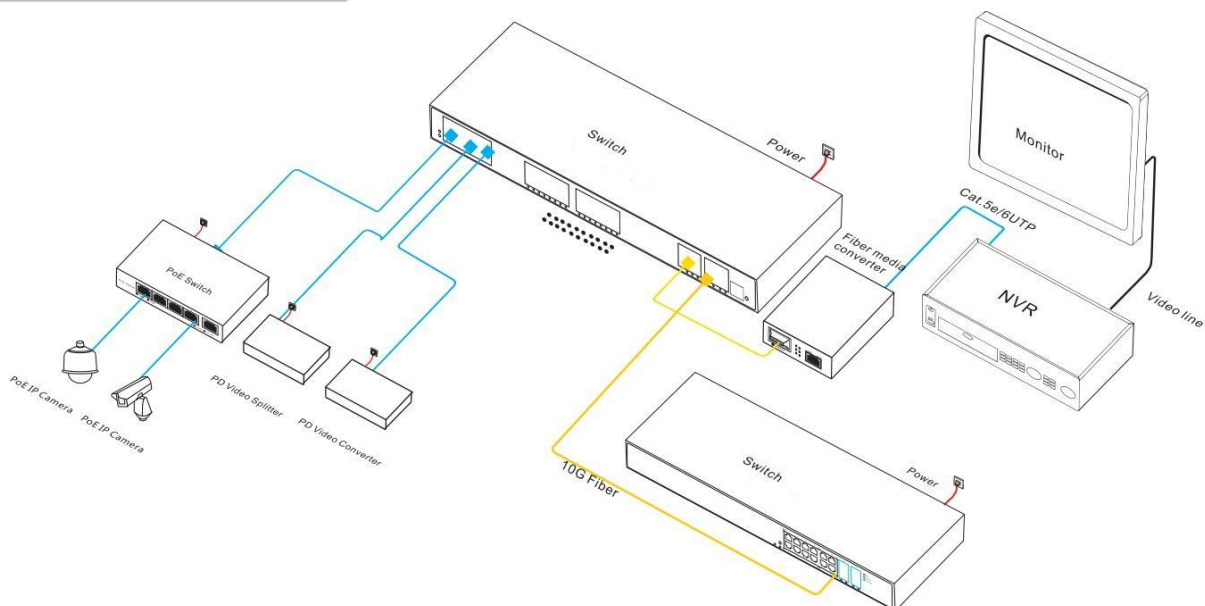

Order Information

Model	Description	Recommended Power Supply
IS830-16E8C4F-B	L3 managed industrial Ethernet fiber switch with 8*10/100/1000Base-T RJ45 or 8*100/1000Base-X SFP combo ports and 16*100/1000Base-X SFP ports and 4*1/10G SFP+ fiber slot ports. Built-in dual power supply. It support 1U/19-inch cabinet installation and 2AC+DC redundant power input (Phoenix terminal connection).	2*60W
Note:The SFP optical module is not included by default and needs to be purchased separately.		

PACKING LIST

	CONTENT	QTY	UNIT
PACKING LIST	36-port 10G uplink L3 managed industrial Ethernet switch	1	SET
	AC Power Cable	1	PC
	Mounting Kits (Hanging Ear)	1	PC
	User Guide	1	PC
	Warranty Card	1	PC